

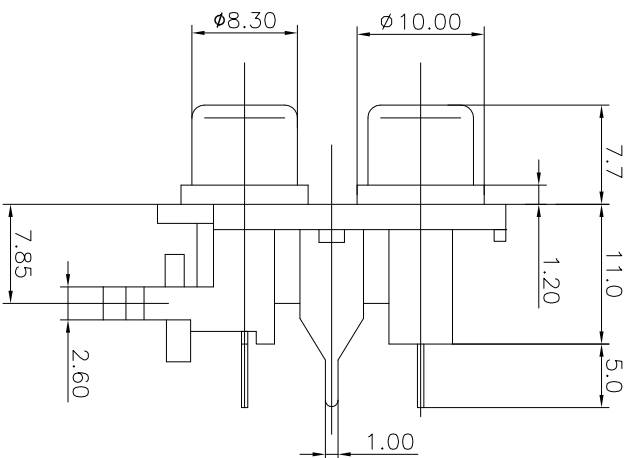



REV.	ECN NO.	MODIFIED MARK	APPROVED
A	—	FIRST RELEASE	

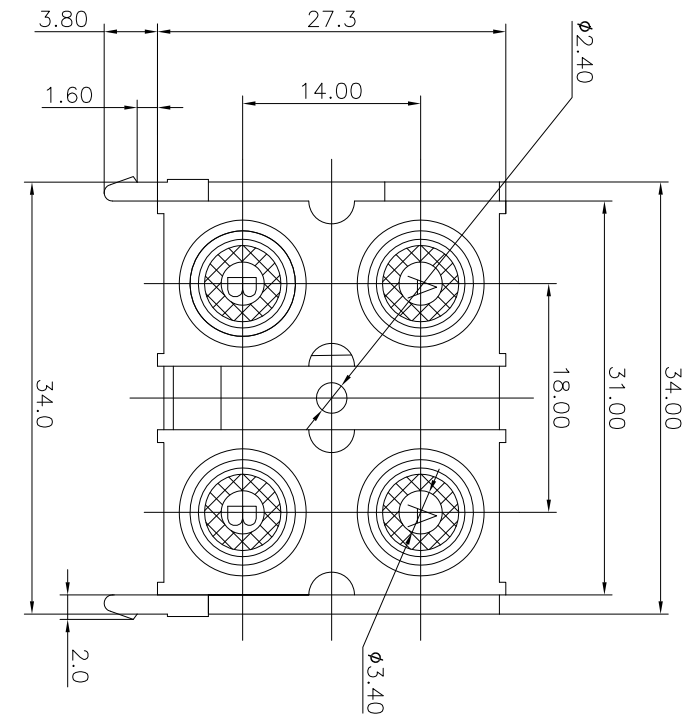

- NOTES:
- ELECTRICAL:
- 1:RATED CURRENT: 0.2A Max.
 - 2:RATED VOLTAGE: 50V AC.
 - 3:CONTACT RESISTANCE: 30 MILLIOHMS Max.
 - 4:INSULATION RESISTANCE: 100 MEGAOHMS Min.
 - 5:DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC Min.
- MECHANICAL:
- 1:INSERTION FORCE: 3N-30N.
 - 2:WITHDRAWAL FORCE: 3N-30N.
 - 3:DURABILITY: 100 CYCLES.
- ENVIRONMENTAL:
- TEMPERATURE RANGE: -20°C TO 60°C.




SCHEMATIC



GAUGE PLUG:

PCB LAYOUT
TOP VIEW

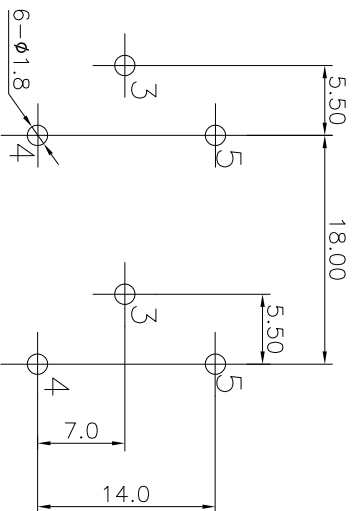

ANGLE	±5°	MODEL NAME: RCA-408 (PART NO.)	广东正宝科技有限公司 GUANGDONG TRENPPO TECHNOLOGY CO., LTD.
63 < L	±0.5		
16 < L ≤ 63	±0.4		
4 < L ≤ 16	±0.3		
L ≤ 4	±0.2		
TOL TABLE:			
THIS DOCUMENT IS THE PROPERTY OF TRENPPO TECHNOLOGY CO., LTD.NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER			
MAT'L:	See table	DESIGN: X.H.Wang 11/15'18	TITLE: RCA PIN JACK
FINISH:	See table	CHECKED: L.W.Wu 11/15'18	DWG NO.:
Q'TY: /		APPROVED: X.Q.Hu 11/15'18	UNIT: mm
			VIEW: 5:1
			SCALE: SHEET: 1/1
			SIZE: A3